FlexScreen

▲ **Projection screen with tensioning arm and extension arm for optimum flexibility with respect to viewing angle and format adjustment.**

Features

Flexible adjustment for positioning of projection screen thanks to unique rotate and tilt facility.

Projection screen may be inclined backwards max. 20° for OHP projection.

Adjustable for video and/or overhead projection.

Optimum taut fabric in all positions thanks to tensioning construction at rear of screen.

Standardly equipped with extension arm for wall mounting.

Technical characteristics

- All projection screens are designed and manufactured according to DIN 19045 parts 1-5.
- Steel case. Galvanised interior and white powder-coated exterior (RAL 9016). Supplied complete with pull cord.
- Matte white S: double-sided laminated vinyl on a woven glass fabric carrier with black backing; reflection value 1.0, viewing angle 50° L/R, weight approx. 425 gr/m² and thickness approx. 0.34 mm.
- Projection screen fabrics satisfy the requirements for fire-resistance of construction materials and components.
- Projection screen fabric has a 2.5-cm black border on left/right side.

Accessories

- Fixed FlexScreen bracket for mounting on ceiling.
  10800031 length 20cm
- Height-adjustable (per 5 cm) FlexScreen ceiling bracket.
  10800032 length 40-60 cm

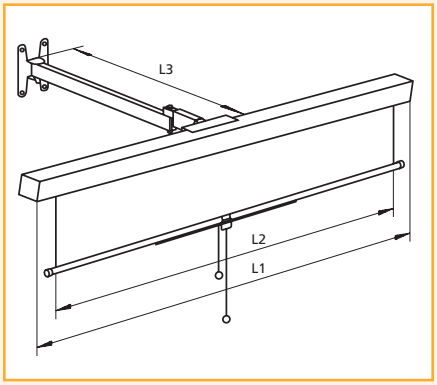

Aspect ratio	Screen size hxw cm	Viewing size hxw cm	Case L1 mm	Case L2 mm	Case L3 mm	Net weight in kg	Screen fabric Matte white S prod. code
4:3	145x145	140x140	1520	1470	680	14	10200058
1:1	160x160	151x151	1711	1620	750	16	10200059
	180x180	173x173	1911	1820	850	18	10200060

The diagonal sizes listed are approximate, in accordance with the market standard. For advice regarding the right size and screen fabric, see page 5-7 or consult the Screen Selector at www.projectascreens.com.

Screens for professionals